

INTRODUCING

CONTRX[®] ARTICULATING JIB

BENEFITS

- Reaching around or under obstructions
- Reaching through doorways
- Reaching into machines/trucks
- Custom Welding
- Easy movement
- Precise load positioning
- Standard capacities of 250 lb and 500 lb
- Spans from 8 to 20 feet
- 1000 lb and 2000 lb capacity models available on request



APPLICATIONS

- Material Handling
- Welding
- Loading/unloading
- Manufacturing



1377 Kimberly Drive
Neenah, Wisconsin 54956
Phone (920) 722-0101
Fax (920) 725-1394


Call now for a quote
920-722-0101 or 800-831-2380

CONTRX INDUSTRIES INC.



Visit us online at <http://www.contrxindustries.com>

Email: sales@contrxcranes.com

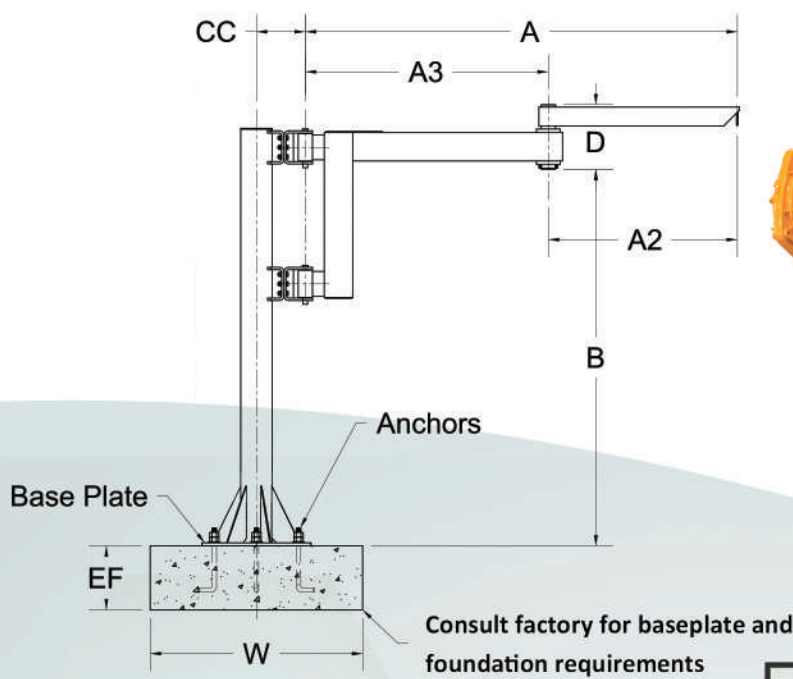


Articulating Jibs— Wall Mounted

CAPACITY (LBS)	MODEL NO.	Overall Span (A)	WEIGHT (LBS)	Bracket Spacing (B) (in)	THRUST & PULL (LBS)
250	AR2508	8'	233	36	1088
	AR2512	12'	281	36	1696
	AR2516	16'	329	36	2361
	AR2520	20'	501	48	2660
500	AR508	8'	233	36	1996
	AR512	12'	350	48	2431
	AR516	16'	734	48	3645
	AR520	20'	828	48	4728

Articulating Jibs—Free Standing Column Mount

CAPACITY (LBS)	HUB (B)	Overall Span (A)	MODEL	CAPACITY (LBS)	HUB (B)	Overall Span (A)	MODEL
250	8'	8'	AR2508CM8	500	8'	8'	AR508CM8
		12'	AR2512CM8			12'	AR512CM8
		16'	AR2516CM8			16'	AR516CM8
		20'	AR2520CM8			20'	AR520CM8
	10'	8'	AR2508CM10		10'	8'	AR508CM10
		12'	AR2512CM10			12'	AR512CM10
		16'	AR2516CM10			16'	AR516CM10
		20'	AR2520CM10			20'	AR520CM10
	12'	8'	AR2508CM12		12'	8'	AR508CM12
		12'	AR2512CM12			12'	AR512CM12
		16'	AR2516CM12			16'	AR516CM12
		20'	AR2520CM12			20'	AR520CM12
	14'	8'	AR2508CM14		14'	8'	AR508CM14
		12'	AR2512CM14			12'	AR512CM14
		16'	AR2516CM14			16'	AR516CM14
		20'	AR2520CM14			20'	AR520CM14

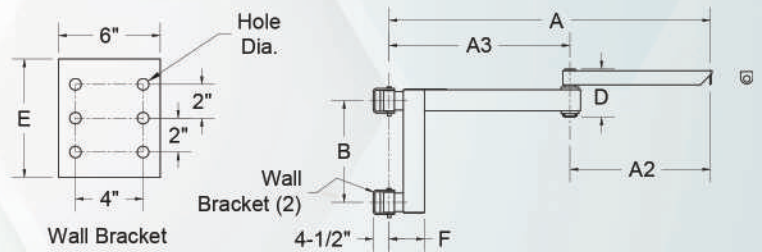

CONTRAX INDUSTRIES INC.



Visit us online at <http://www.contraxindustries.com>

Email: sales@contraxcranes.com